

- Contenitori in 3 pezzi, con valvola by-pass incorporata a 3 posizioni.
- 3-piece housings, with by-pass valve-in-head system, 3 positions.
- Conteneurs en 3 pièces, avec système by-pass intégré dans la tête, à 3 positions.
- Dreiteilige Gehäuse mit eingebautem "By-pass"-Ventil auf 3 Stellungen einstellbar.

mod. 120

Valvola di sfiato pressione in plastica/Plastic pressure relief valve/Purge pression en plastique/Plastik-Auslassventil

Ref.	Ingressi/Inlet/Entrées/Anschlüsse	Diam./Ø	Vaso/Bowl/Bol/Behälter
1 120	Inserti ottone/Brass inserts/Inserts laiton/Messing-Anschlüsse	3/4"-1" (BSP)	9,3/4"/SAN-PC-PP
2 120	Inserti ottone/Brass inserts/Inserts laiton/Messing-Anschlüsse	3/4"-1" (BSP)	20"/SAN-PC-PP


mod. 220

Valvola di sfiato pressione in plastica/Plastic pressure relief valve/Purge pression en plastique/Plastik-Auslassventil

Ref.	Ingressi/Inlet/Entrées/Anschlüsse	Diam./Ø	Vaso/Bowl/Bol/Behälter
3 220	Plastica/Plastic/Plastique/Plastik	3/4"-1" (NPT)	9,3/4"/SAN-PC-PP
4 220	Plastica/Plastic/Plastique/Plastik	3/4"-1" (NPT)	20"/SAN-PC-PP

Dati tecnici/Technical data/Données techniques/Technische Angaben

Testa/Head/Tête/Kopf	Polipropilene talco/Talc polypropylene/Polypropylène talc/Talk Polypropylen
Selettore By-pass/By-pass selector/Sélecteur by-pass/"By-pass"-Wähler	P.O.M.
Copri-selettore/Selector cover/Couvercle Sélecteur/Wählerdeckel	Poliamide/Polyamide/Polyamide/Polyamid
Ghiera/Ring-nut/Bague/Nutmutter	Polipropilene talco/Talc polypropylene/Polypropylène talc/Talk Polypropylen
Vaso/Bowl/Bol/Behälter	SAN-PC Trasparente/Clear transparent/Transparent/durchsichtig PP Opaco bianco/White opaque/Blanc opaque/weiß undurchsichtig
O-ring	NBR
Pressione max. d'esercizio/Max. working pressure/Pression max. en service/Max. Betriebsdruck	8,6 bar (125 psi)
Temperatura max. servizio continuo/Max. temperature continuous service/ Température max. en service continu/Max. Temperatur beim Dauerbetrieb	40° C

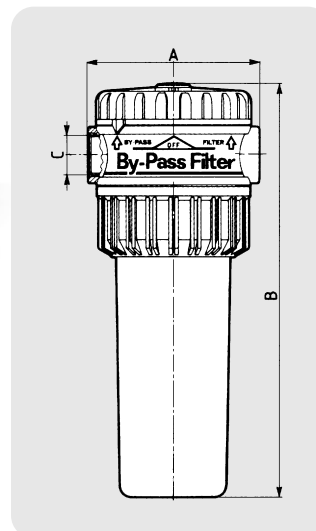

Mod.	A mm	B mm	C BSP-NPT	Imballo - Packing		
				No.	kg	m ³
1 120 - 9 3/4"	140	339	3/4" - 1"	12	16	0.104
2 120 - 20"	140	615	3/4" - 1"	1	2	0.014
3 220 - 9 3/4"	140	339	3/4" - 1"	12	15.2	0.104
4 220 - 20"	140	615	3/4" - 1"	1	1.9	0.014