

- Contenitore in 3 pezzi, testa staffabile.
- 3-piece housing, bracket mountable head.
- Conteneur en 3 pièces, tête montable avec équerre.
- Dreiteiliges Gehäuse, zur Wandbefestigung ausgerüsteter Kopf.


mod. 223

Valvola di sfianto pressione in plastica/Plastic pressure relief valve/Purge pression en plastique/Plastik-Auslassventil

Ref.	Ingressi/Inlet/Entrées/Anschlüsse	Diam./Ø	Vaso/Bowl/Bol/Behälter
1 223	Plastica/Plastic/Plastique/Plastik	1/4"-3/8"-1/2"-3/4" (BSP-NPT)	5"/SAN
2 223	Plastica/Plastic/Plastique/Plastik	1/4"-3/8"-1/2"-3/4" (BSP-NPT)	7"/SAN
3 223	Plastica/Plastic/Plastique/Plastik	1/4"-3/8"-1/2"-3/4" (BSP-NPT)	9,3/4"/SAN-PP

Dati tecnici/Technical data/Données techniques/Technische Angaben

Testa/Head/Tête/Kopf	Polipropilene talco/Talc polypropylene/Polypropylène talc/Talk Polypropylen
Ghiera/Ring-nut/Bague/Nutmutter	Polipropilene talco/Talc polypropylene/Polypropylène talc/Talk Polypropylen
Vaso/Bowl/Bol/Behälter	SAN Trasparente/Clear transparent/Transparent/durchsichtig PP Opaco bianco/White opaque/Blanc opaque/weiß undurchsichtig
O-ring	NBR
Pressione max. d'esercizio/Max. working pressure/Pression max. en service/Max. Betriebsdruck	8,6 bar (125 psi)
Temperatura max. servizio continuo/Max. temperature continuous service/ Température max. en service continu/Max. Temperatur beim Dauerbetrieb	40° C

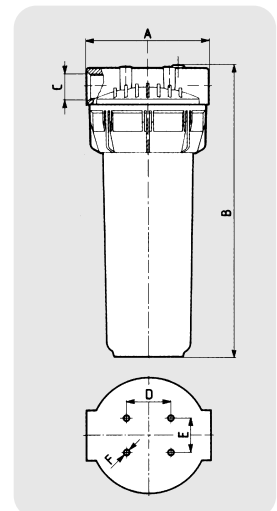

Mod.	A mm	B mm	C BSP-NPT	D mm	E mm	F mm	Imballo - Packing		
							No.	kg	m ³
1 223 - 5"	123	177	1/4" - 3/8"	40	33	4	21	13.1	0.086
2 223 - 5"	123	186	1/2" - 3/4"	45.5	33	4	21	13.1	0.086
223 - 7"	123	229	1/4" - 3/8"	40	33	4	12	9	0.086
223 - 7"	123	238	1/2" - 3/4"	45.5	33	4	12	9	0.086
3 223 - 9 3/4"	123	302	1/4" - 3/8"	40	33	4	12	10.6	0.086
223 - 9 3/4"	123	311	1/2" - 3/4"	45.5	33	4	12	10.6	0.086