



FILTER HOUSINGS MOD. SB



TESTA IN OTTONE NICHELATO E VASO AISI 304 / NICKEL-PLATED BRASS HEAD AND AISI 304 SUMP

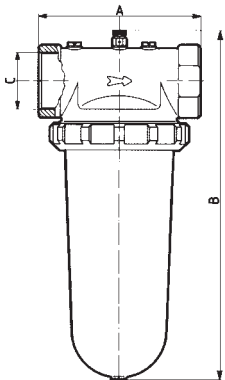

mod. SB - mod SB

WF Code	Description	Size inches	In/Out inches	Ø cartridge	Bowl material	Pack units
31.9340.00	CONT. SB 9"3/4 INOX 3/4 G OTT NIK	9 3/4	3/4	28	AISI 304	1
31.9100.00	CONT. SB 9"3/4 INOX 1 G OTT NIK	9 3/4	1	28	AISI 304	1
31.9114.00	CONT. SB 9"3/4 INOX 1 1/4" G OTT NIK	9 3/4	1 1/4	50	AISI 304	1
31.9112.00	CONT. SB 9"3/4 INOX 1 1/2" G OTT NIK	9 3/4	1 1/2	50	AISI 304	1
31.9200.00	CONT. SB 9"3/4 INOX 2" G OTT NIK	9 3/4	2	50	AISI 304	1
31.2340.00	CONT. SB 20" INOX 3/4" G OTT NIK	20	3/4	28	INOX	1
31.2100.00	CONT. SB 20" INOX 1" G OTT NIK	20	1	28	INOX	1
31.2114.00	CONT. SB 20" INOX 1 1/4" G OTT NIK	20	1 1/4	50	INOX	1
31.2112.00	CONT. SB 20" INOX 1 1/2" G OTT NIK	20	1 1/2	50	INOX	1
31.2200.00	CONT. SB 20" INOX 2" G OTT NIK	20	2	50	INOX	1

ACCESSORI / ACCESSOIRES

MSWBP5B	CHIAVE METALLO SERRAGGIO BP SB STAF	METAL SPANNER FOR BP SB Metal wall bracket for
---------	-------------------------------------	--

DATI TECNICI / TECHNICAL DATA

Testa / Head	Ottone nikel / Nickel-plated brass
Vaso / Bowl	INOX
O-ring / O-ring	NBR
Pressione max. d'esercizio / Max. working pressure	15 bar
Temperatura max. in esercizio continuo / Max. temperature continuous service	90° c