


FILTER CARTRIDGES MOD. LD - LDC

CARTUCCIA IN CARBONE ATTIVO / ACTIVATED CARBON CARTRIDGE

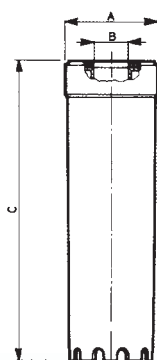

mod. LD - LDC - mod LD - LDC

WF Code	Description	Size inches	Micron rating	Filter material	Pack units
9008916	CART. SERIE LD (9-LD-10)	9 3/4	10	Synthetic fibers + AC	30
9008912G	CART. SERIE LDC (5-LDC-10) gasket	5	10	Synthetic fibers + AC	60
9008911	CART. SERIE LDC (9-LDC-10)	9 3/4	10	Synthetic fibers + AC	30
9008969HM	CART. FXULC CARBON FLOW CONTROL CAP	10"	20	Activated carbon film	32

APPLICAZIONI

sistemi di filtrazione e rimozione impurità, cloro e contaminanti al punto d'uso, trattamento acqua ad uso industriale e civile, acque di processo; pre e post filtrazione in sistemi ad osmosi inversa.

APPLICATIONS

Filtration systems and removal of impurities, chlorine and contaminants at the point-of-use, domestic and industrial water treatment, process waters, pre and post-treatment stage in reverse osmosis systems.

DATI TECNICI / TECHNICAL DATA

Temperatura max d'esercizio / Max operating temperature	40° c
Gradi di filtrazione / Standard filtration rates	10 μ

Struttura combinata di fibre sintetiche, cellulosa e carbone attivo (mod LD) fibre sintetiche e carbone attivo (mod LDC)
 Combined structure of synthetic fibers, cellulose and activated carbon MOD LD - synthetic fibers and activated carbon mod LDC.